


Technical Overview

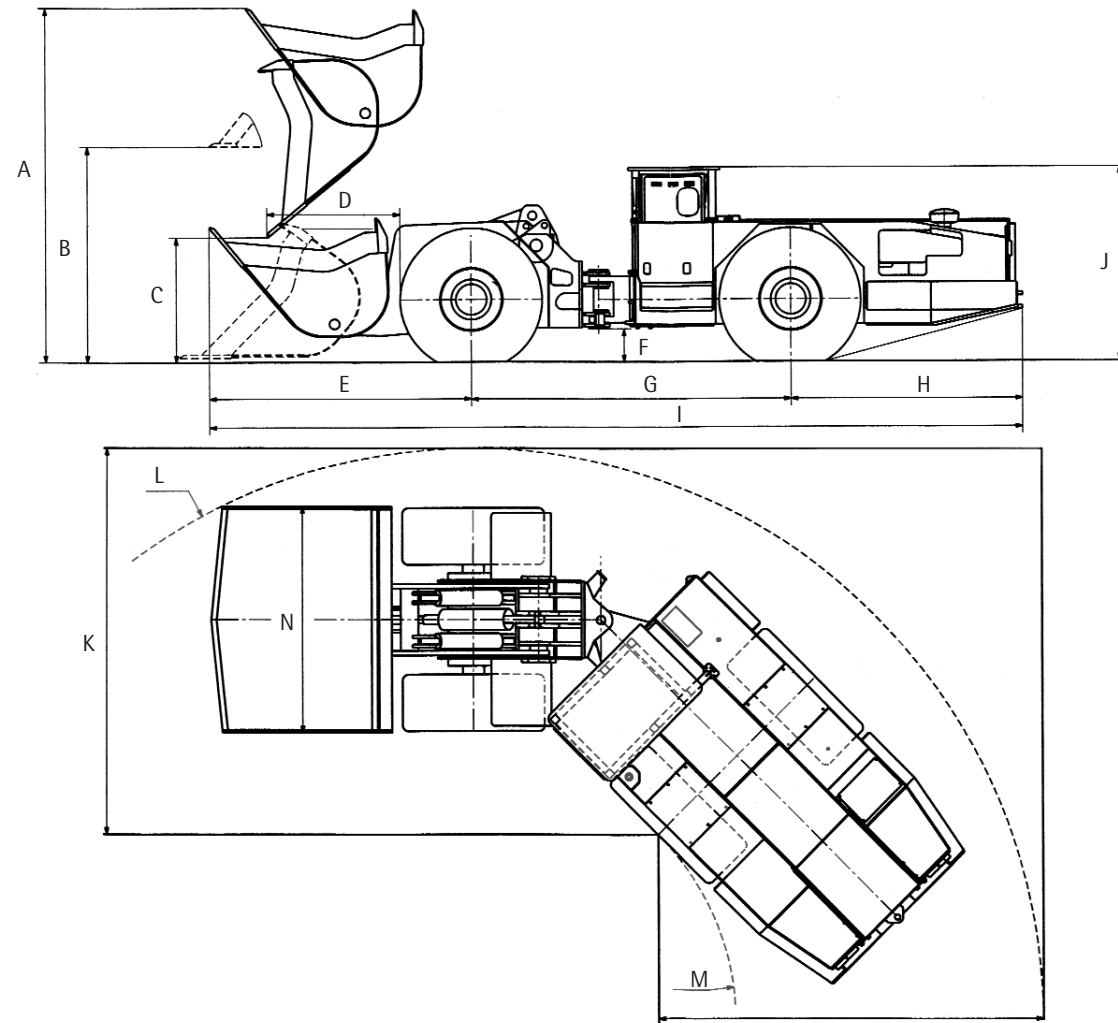

Dimensions (in mm) corresponding to standard bucket / subject to customer needs

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
PFL 8	2670	1700	1050	1150	1755	210	2040	1365	5100	1720	2200	3475	1825	1200
PFL 12	2750	1840	950	840	2300	200	2640	2070	7010	1850	2750	4650	2700	1350
PFL 18	3300	2020	1100	1150	2350	240	1670	2190	7210	1850	3000	5050	2900	1660
PFL 30	3820	2130	1370	960	2610	270	2800	2220	7630	2015	3300	5350	2750	1850
SFL 65	3591	2260	1400	1253	2610	325	2995	2445	7960	2150	3751	5459	2416	2150
SFL 95	4415	2864	1700	1300	3140	350	3670	2220	9182	2545	4544	6795	3184	2500
SFL 130	4826	2973	1700	1671	3605	406	4500	3220	11325	2800	5176	7861	3797	2900
SFL 150	4950	3000	1700	1970	3695	406	4500	3275	11470	2700	5380	8050	3770	3180
SFL 180	5349	3133	1816	1926	4848	396	5038	3000	12086	2724	6509	9726	5001	3750

Tolerance of mentioned data +/- 3%. Specifications subject to change without notice. Drawings and pictures may include options.

Hermann Paus Maschinenfabrik GmbH
 Siemensstraße 1-9
 D-48488 Emsbüren
 Phone +49 (0) 5903 / 707-0
 Fax +49 (0) 5903 / 707-40
 www.paus.de
 mail@paus.de

SCHOPF Maschinenbau GmbH
 Parkstrasse 19-21
 D-73760 Ostfildern/Germany
 Phone +49 (0) 7 11 3 40 00-0
 Fax +49 (0) 7 11 3 41 10 87
 www.schopf-gse.com
 schopfsale@schopf-gse.com

Mining & Tunneling Loaders



PAUS & SCHOPF

The most comprehensive range of mining loaders.



Loaders. Dump Trucks. And more.

PAUS & SCHOPF: Mining and Tunneling Loaders for heavy tasks.

The underground mining product ranges from SCHOPF and PAUS complement each other perfectly, and by combining our strengths we now cover the full spectrum of underground loaders with capacities ranging from 1,500 kg to 18,000 kg, enabling us better to meet both our

clienteles' requirements. Since we have also pooled our sales and after sales resources, our customers can depend on highly effective single-source service covering the combined product ranges of both companies. **Compelling reasons for successful teamwork.**



PFL 8

Deutz BF3L2011	40 kW	54 hp
Payload	1500 kg	3304 lbs
Bucket	0.8 m ³	1.0 yd ³



PFL 12

Deutz F5L912W	50 kW	67 hp
Payload	2000 kg	4405 lbs
Bucket	1.2 m ³	1.6 yd ³



PFL 18

Deutz F6L912W	69 kW	93 hp
Deutz BF4M1012C	78 kW	105 hp
Payload	3500 kg	7709 lbs
Bucket	1.8 m ³	2.3 yd ³



PFL 30

Deutz BF6M1013C	115 kW	154 hp
Deutz F6L413FW	102 kW	137 hp
Payload	6000 kg	13216 lbs
Bucket	2.5 m ³	3.3 yd ³




SFL 65

Deutz F8L413FW	136 kW	182 hp
Payload	6500 kg	14317 lbs
Bucket	3.5 m ³	4.6 yd ³



SFL 95

Deutz F10L413FW	170 kW	228 hp
Payload	9500 kg	20925 lbs
Bucket	4.7 m ³	6.1 yd ³

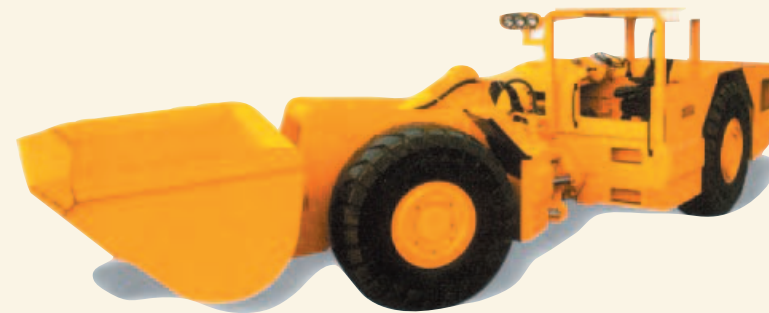

SFL 130

Deutz F12L413FW	204 kW	274 hp
Payload	13000 kg	28634 lbs
Bucket	7.0 m ³	9.1 yd ³



SFL 150

Detroit Diesel S60	261 kW	350 hp
Deutz BF6M1015C	261 kW	350 hp
Payload	15000 kg	33040 lbs
Bucket	8.0 m ³	10.4 yd ³



SFL 180

Deutz BF6M1015C	261 kW	350 hp
Payload	18000 kg	39648 lbs
Bucket	9.0 m ³	12.0 yd ³