EPAUS
...the people who care

Telescopic Elevator
Easy Flex

NEW

STRONG. STABLE. DURABLE.
EVERY DAY.

Easy Flex
Overview

USER-FRIENDLY
Precise and sensetive controls.

MULTIFUNCTIONAL
Optional hydraulic double knee joint.



PRACTICAL
360° rotatable.

COMPACT
Minimal setup space, as the drawbar is lifted together with the rail package.

NARROW DESIGN
Narrow passage width of only 1.60 m.

EFFORTLESS
Optional hydraulic turntable allows easy and precise positioning.

FLEXIBLE
Swiveling and telescopic X-support system enables various setup configurations.

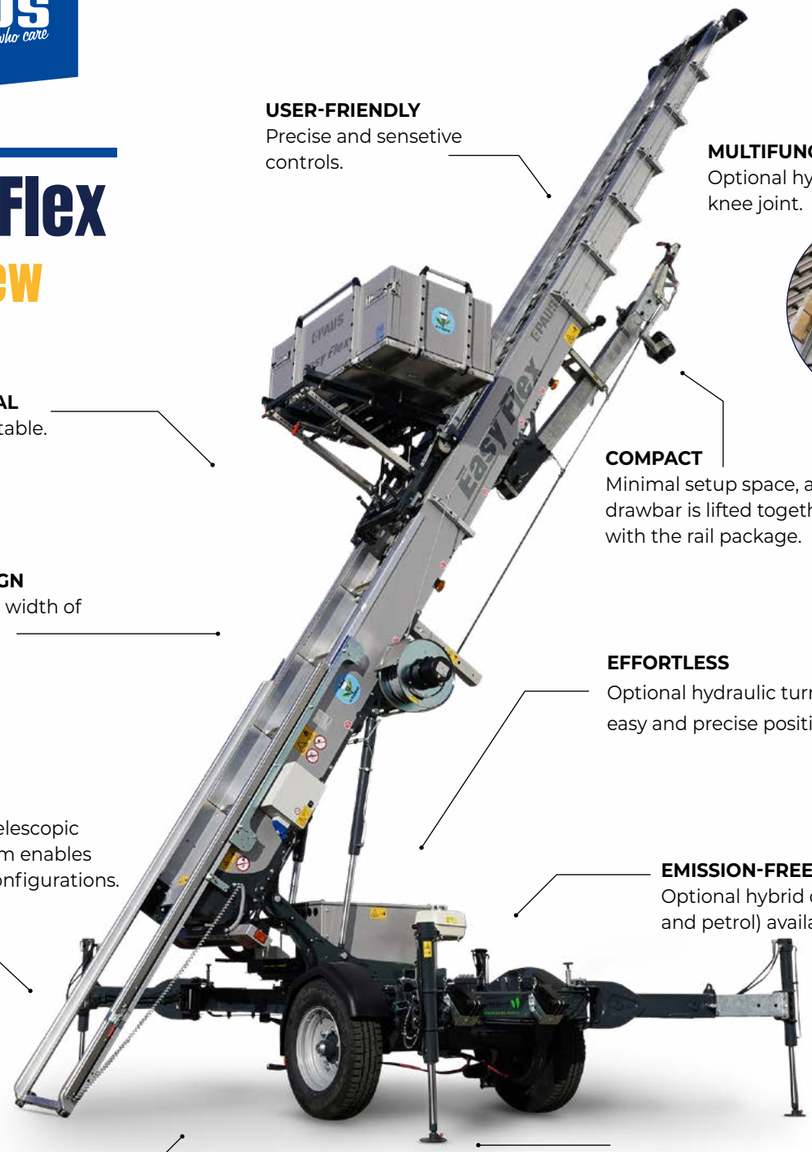

EMISSION-FREE
Optional hybrid drive (230 V and petrol) available.

OPTIONAL: POWERPACK
Autonomous, silent, and emission-free power supply.

STABLE OPTIONS
High stability thanks to hydraulic support system.

UNIQUE

With a transport width of just 1.60 m and a length of under 7 m, the Easy Flex is the most compact lift in its class.

Even the largest model, the Easy Flex 35, can be effortlessly used to reach the first floor.

Details
Easy Flex

Comfortable

Numerous options are available for maximum user convenience: hydraulic support, wheel drive, proportional steering, and even a hydraulic turntable.

Versatile

Thanks to a wide range of platforms, the Easy Flex is suitable for various applications, including:

- Building material transport
- Roofing
- Green Roofing
- Moving & relocation
- Window installation
- Photovoltaic and solar installations

*The images shown in this brochure may contain optional equipment.

Innovative

The swiveling and telescopic support system ensures exceptional stability and maximum safety.

Even under demanding conditions.

Compact

With a passage width of just 1.60 m, the Easy Flex easily fits through narrow access points and proves to be a reliable partner even in confined spaces.

PAUS
...the people who care

TECHNICAL DATA	Easy Flex 27	Easy Flex 31	Easy Flex 35	Easy Flex 28 K
Number of profiles	1 - 6	1 - 7	1 - 8	1 - 7
Profile length	5,000 mm	5,000 mm	5,000 mm	5,000 mm
Maximum payload	250/400* kg	250/400* kg	250/400* kg	250 kg
Extension length, approx.	5.0 - 27.0 m	5.0 - 31.0 m	5.0 - 35.0 m	5.25 - 28.0 m
Total weight (basic equipment)	1,850 kg	2,000 kg	2,150 kg	2,050 kg
Transport length	6,950 mm	6,950 mm	6,950 mm	6,950 mm
Transport width	1,600 mm	1,600 mm	1,600 mm	1,600 mm
Drive	Honda petrol / 230 V electric	Honda petrol / 230 V electric	Honda petrol / 230 V electric	Honda petrol / 230 V electric

*Only in combination with the rotatable and retractable furniture platform.

We care

We inspire as a preferred, innovative partner with individual solutions for transport and safety of humans and material.

As a specialist for complete and special solutions Paus offers an extensive range of machines for mining and tunneling, lift technology and construction machinery since 1968.

Paus means „Quality Made in Germany“.

Our quality management is certified according to ISO 9001.

ZDH ZERT
DIN EN ISO 9001
REG.-NR. 01 0310007

IHK
2020 - 2023
TOP AUSBILDUNG
UNSERE BESTEN

HERMANN PAUS
MASCHINENFABRIK GMBH
Siemensstraße 1–9
D-48488 Emsbüren
Tel.: +49 5903 707-0

info@paus.de
www.paus.de

Follow us

Publication details © Copyright 2025, Hermann Paus Maschinenfabrik GmbH, Emsbüren, Germany. Any form of unauthorised use or reproduction of the content, in whole or in part is prohibited. Illustrations and photos may show features with optional equipment. The specifications printed here are without guarantee. The right is reserved to amend the technical data and the equipment without advance notice. Please contact Hermann Paus Maschinenfabrik GmbH for further information.